


BODY MARKING

EFS
SIZE
RATING
MATERIAL
HEAT NO.

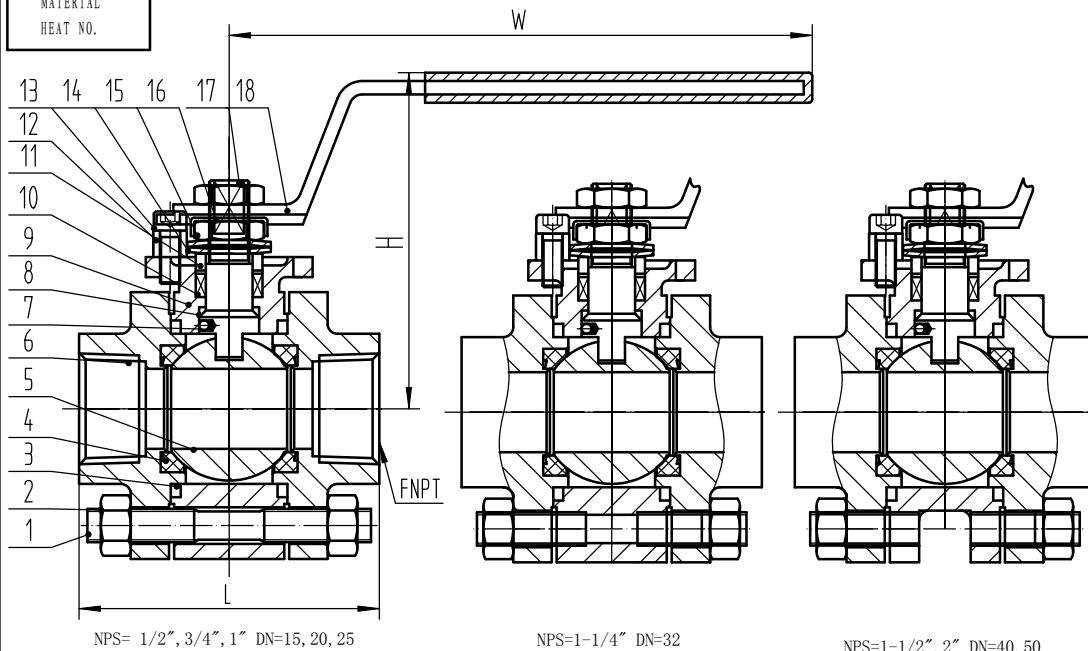

- Features:
1. Design standard: ASME B16.34
 2. Face to face: As MFR STD.
 3. Thread ends: ASME B1.20.1
 4. Test & inspection: API 598

SPECIFICATION			
Pressure	2000WOG		
Pressure test	Shell (hydrostatic)	20.7	MPa
	Seat (hydrostatic)	15.2	
	Seat (air test)	0.6	
Application Temp.	-29° C ~ 150° C		

18	Q11F-2000WOG-10	Lever	/	SS304+Rubber			
17	Q11F-2000WOG-09	Stem	/	A182 F53			
16	Q11F-2000WOG-08	Thrust washer	/	SS304			
15	GB/T 6173-2000	Hex nut	/	SS304			
14	GB/T 1972-2005	Belleville spring	/	17-7PH			
13	GB/T 70.1-2000	Screw	/	SS304			
12	Q11F-2000WOG-07	Locating nut	/	SS304			
11	Q11F-2000WOG-06	Gland bushing	/	A182 F53			
10	WSV021-2008	Packing	/	Graphite			
9	Q11F-2000WOG-05	Body	/	A890 5A			
8	Q11F-2000WOG-04	Anti-friction washer	/	PTFE			
7	WSV003-2008	Anti-static device(Spring)	/	Inconel X750			
6	Q11F-2000WOG-03	Bonnet	/	A890 5A			
5	Q11F-2000WOG-02	Ball	/	A890 5A			
4	Q11F-2000WOG-01	Seat	/	RPTFE			
3	WSV012-2008	Gasket	/	PTFE			
2	GB/T 6170-2000	Hex nut	/	SS304			
1	GB/T 901-2000	Bolt	/	SS304			

Main Dimension(mm)

Item Code	L	FNPT	W	H (Open)	Torque (N.M)
Q11F-2000WOG-1/2"	75	1/2"	136	85	26
Q11F-2000WOG-3/4"	85	3/4"	136	90	50
Q11F-2000WOG-1"	90	1"	176	95	85
Q11F-2000WOG-1-1/4"	112	1-1/4"	176	105	120
Q11F-2000WOG-1-1/2"	125	1-1/2"	221	118	145
Q11F-2000WOG-2"	145	2"	221	128	200

NO.	CODE	MAIN PARTS	QTY	MATERIAL	REMARKS		
DESCRIPTION							
DRAWING							
Z				3PC FLOATING BALL VALVE FNPT ENDS, 2000WOG BODY: A890 5A LEVER OP.			
SALES	DRAWN	ASSESS	AUTHORIZE			REV.	DATE
DRW. NO.	Q11F-2000WOG-00		Ref. No.			Z2007-159-2	
NOTES	ITEM 3-8						
EFS VALVES®							
